


TELESCOPING SERIES

ACE -TS

Adjust it high for the taller dispensers:

Higher Cabinet Clearance
26.25" H x 8.5" W x 17.5" D
Basket Clearance: 19"

Shown with dispenser PN: 120705
2.5 L Shurizjo Airpot

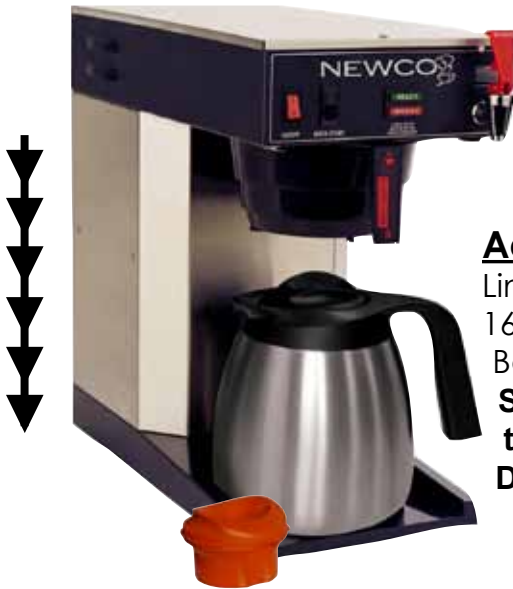

Adjust for the short dispensers:

Limited Counter Cabinet Clearance
16.75" H x 8.5" W x 17.5" D
Basket Clearance: 9.5"

Shown with dispenser PN: 109115
the 1.9 L Thermal Butler
Decaf Lid Only PN: 109385

ONE BREWER...ONE SOLUTION

Newco's Telescoping Brewer that adjusts to fit your shorter dispensers.

FEATURES:



- Ready light indicates optimum brew temperature.
- Flashing brew light alerts user that coffee is brewing.
- Universal base for perfect dispenser alignment.
- Gravity fed hot water faucet for tea, soups and hot cocoa.
- Tank "ON/OFF" switch for easy installation.
- Pulse brewing option - when turned "on" allows pulsation of water over coffee grounds of coffee.
- Auto arm capable. When activated locks out brew cycle until optimum temperature is achieved.
- PDS Valve. The most accurate flow control on the market, eliminating service calls due to inconsistent pot levels.

ACE-TS TELESCOPING

ACE SHORT TELE

Machine Height Basket clearance in Inches

16.5 Minimum	9.5 Minimum
17.25	10
18.25	11
19.25	12
20.25	13
21.25	14
22.25	15
23.25	16
24.25	17
25.25	18
26.25 Maximum	19 Maximum

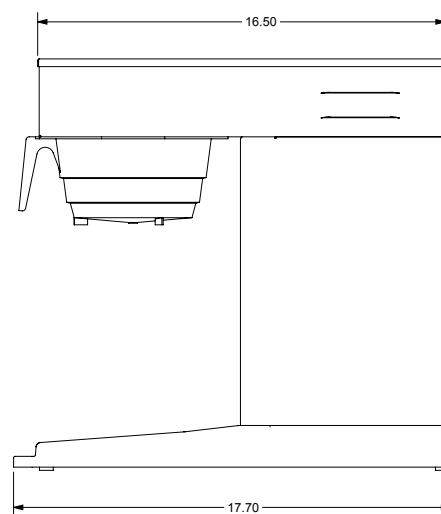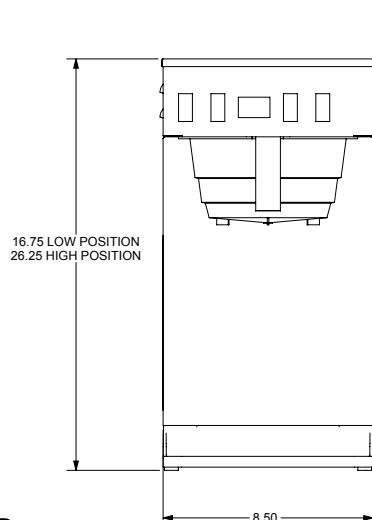

TELESCOPING BREWER

TD CONFIGURATION:

- Brews Into The 2.5L Zojirushi AYA-E with Base
- Brews Into The 1.9L & 2.5L Thermal Servers w/ Reg Base.
- Brews Into The 3.8L ShurizJo Thermal Servers Without Base.

AP CONFIGURATION:

- Brews Into The 2.0L Up To 2.5L Vessels
- Brews Into The 1.9L Up To 2.5L Vessels
- Brews Into The 2.0L Up To 2.5L Vessels
- Brews Into The 2.2L KK Airpots.

LD CONFIGURATION:

- Brews Into The 2.5L Zojirushi AYA-E
- Brews Into The 1.9L Up To 3.8L ShurizJo Thermal Servers Without Base.
- Brews Into The 2.0L ShurizJo Airpot.

TC CONFIGURATION:

- Brews Into Thermal Butler/ Brew though lid.
- Brews Into Short Thermal Carafe/ Brew though lid/ Vaculator.
- Brews Only Into The 1.9L Vaculator S/S Thermal Server - Tall.

Item #	Model	Physical Dimensions			US Electrical				Canada Electrical		
		H	W	D	Ship Wt.	Volts	Watts	Amps	Volts	Watts	Amps
105600	ACE-TS, SHORT	VAR	8.5	17.5	34	120	1750	14.6	120	1400	11.7

Plumbing: Water line should be 20-90 PSI and have a minimum flow rate of 1.5 GPM. Mechanical connection on brewer is 1/4" male flare connector

Electrical: 120V models are 2 wires plus ground service rated 120V, single phase, 60Hz. 120/240 V models are 3 wires plus ground service rated 120/240 V, single phase, 60Hz

*Cord not included on 240v models. Available for purchase. Contact Customer Service.



#INNOVATIONS 4U!

by DC Canada

info@absystems.ca

(855)532-5522

absystems.ca

