

Single 60:1 LD Dual Voltage

Easy Set-Up!


Set-up on the 60:1 Brewing system is easy. Simply plumb in the water supply, plug in the system, and turn the machine on. The 60:1 system will sense a dry probe and begin filling the tank automatically. Once the water in the tank has reached the proper level, the element will automatically turn on and begin heating. In minutes, the correct brewing temperature will be reached, and you're ready to brew !

Features:

- Touch Key Buttons customize your coffee type or container type using digital controls for volume control, pulse brewing, drain time and temperature.
- Programmable flow rate to adjust desired turbulence in the brew basket.
- Digital Time Display lets you know when the coffee will be done.
- Coffee Ready Light lets you know that you're ready to brew.
- Brewing in 4.0L Vaculator
- Brewer Signal alerts when coffee is ready.
- Brewing Light flashes to alert the user that the brewing is in process.
- Auto-Arm, our temperature sentry: will only allow brewing to happen at the correct temperature.
- Power Bar signals that brewer is "On".
- Hot Water Faucet can deliver water at any time.



Single 60:1 LD Dual Voltage

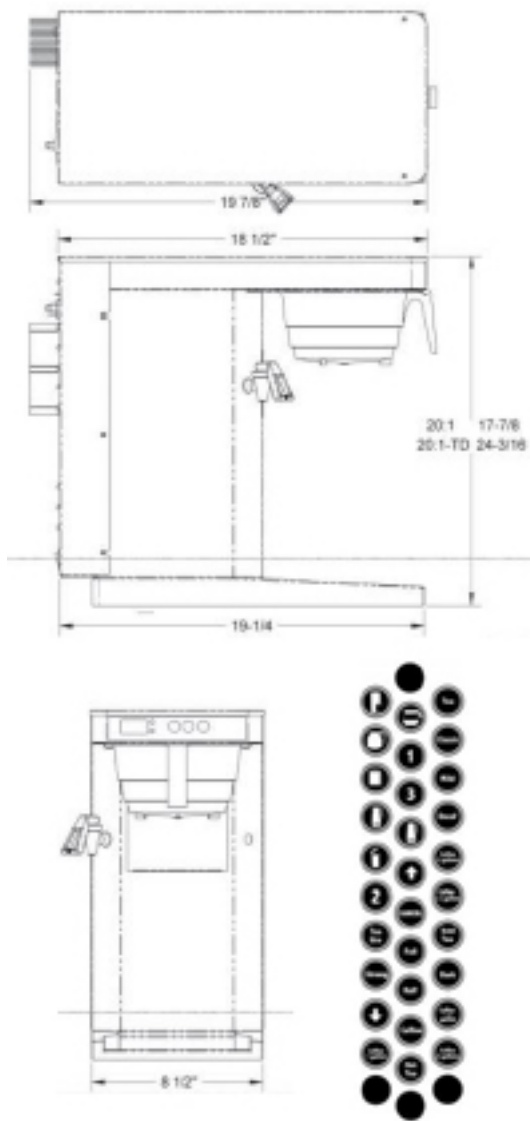

You can also brew in 1.9L servers or 2.5L airpots.

Canada: 120V/11.7 Amps (120V power cord included)
240V/14.6 Amps (240V optional power cord)

