



VIVREAU®
ADVANCED WATER SYSTEMS

V3-205





Intertek



MINI BOTTLER

Re-usable glass bottler | V3-205





- * Dispenses chilled, still and sparkling water
- * Substantially reduce costs of purchasing pre-bottled mineral waters
- * Re-usable glass bottles in 425ml, 500ml, 750ml and 1 liter sizes
- * Bottles can be personalized
- * Save the environment - eliminate regular deliveries as well as the disposal of empty bottles and packaging
- * High performance ice bank refrigeration system capable of delivering very high volumes of chilled water at low temperatures, particularly at peak demand times
- * Eliminate any storage issues
- * Purpose designed bottle washing trays designed to fit most commercial dishwashers
- * Removable tap nozzles for ease of cleaning and sanitizing
- * Stainless steel drip tray





Intertek

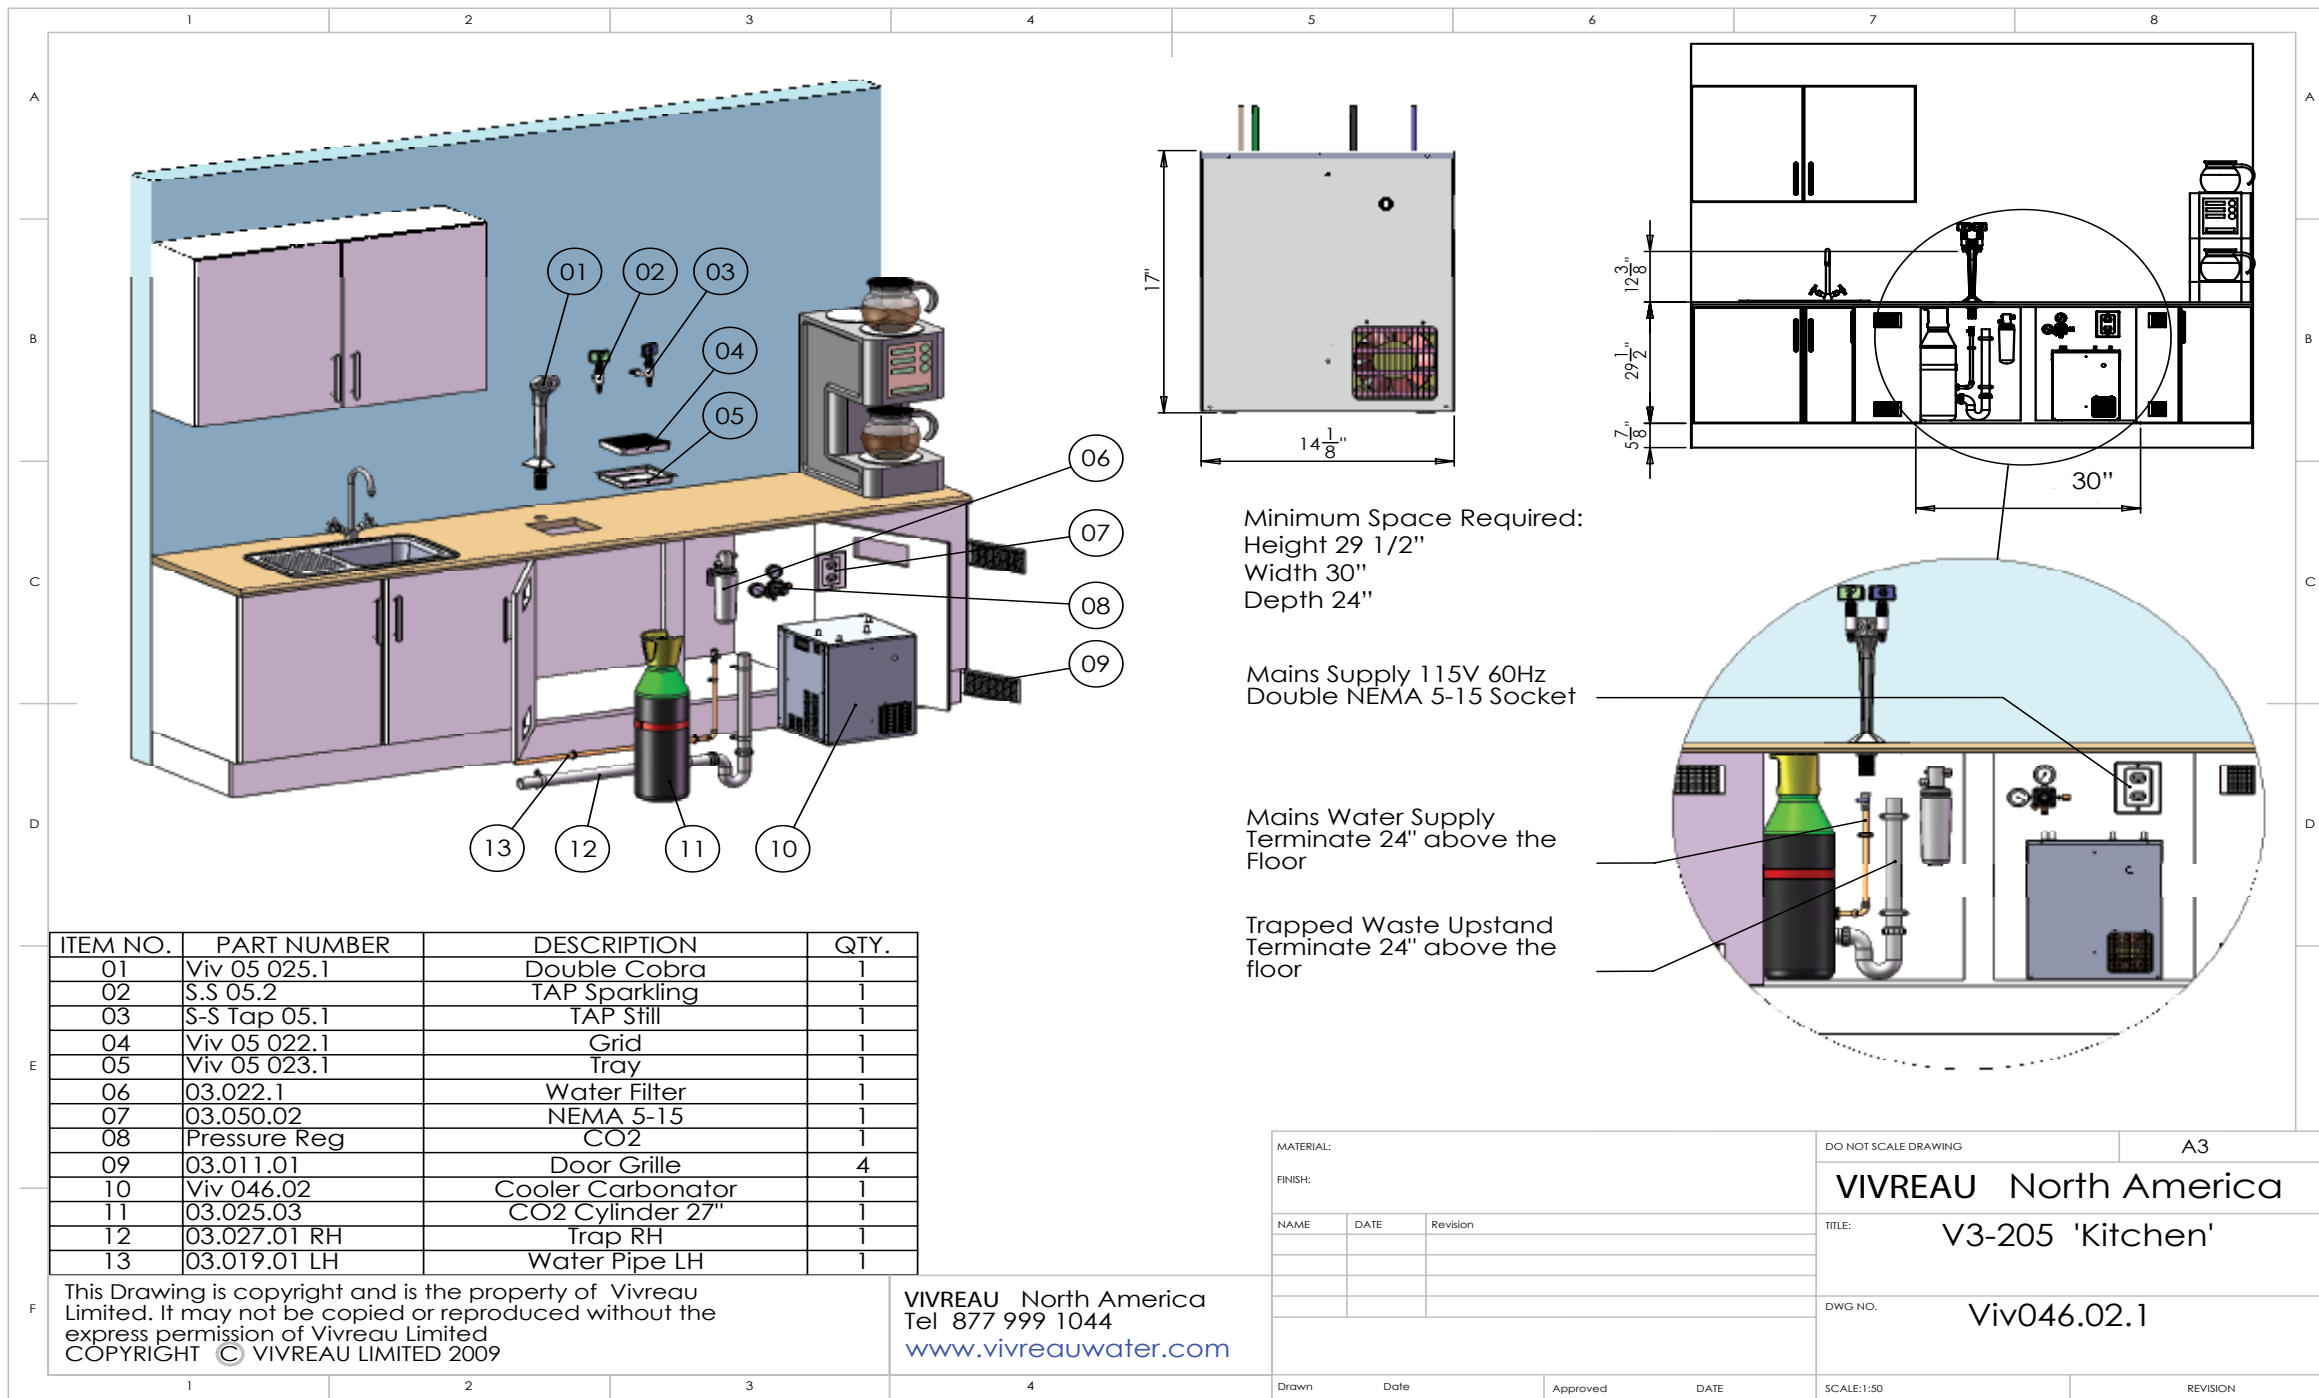

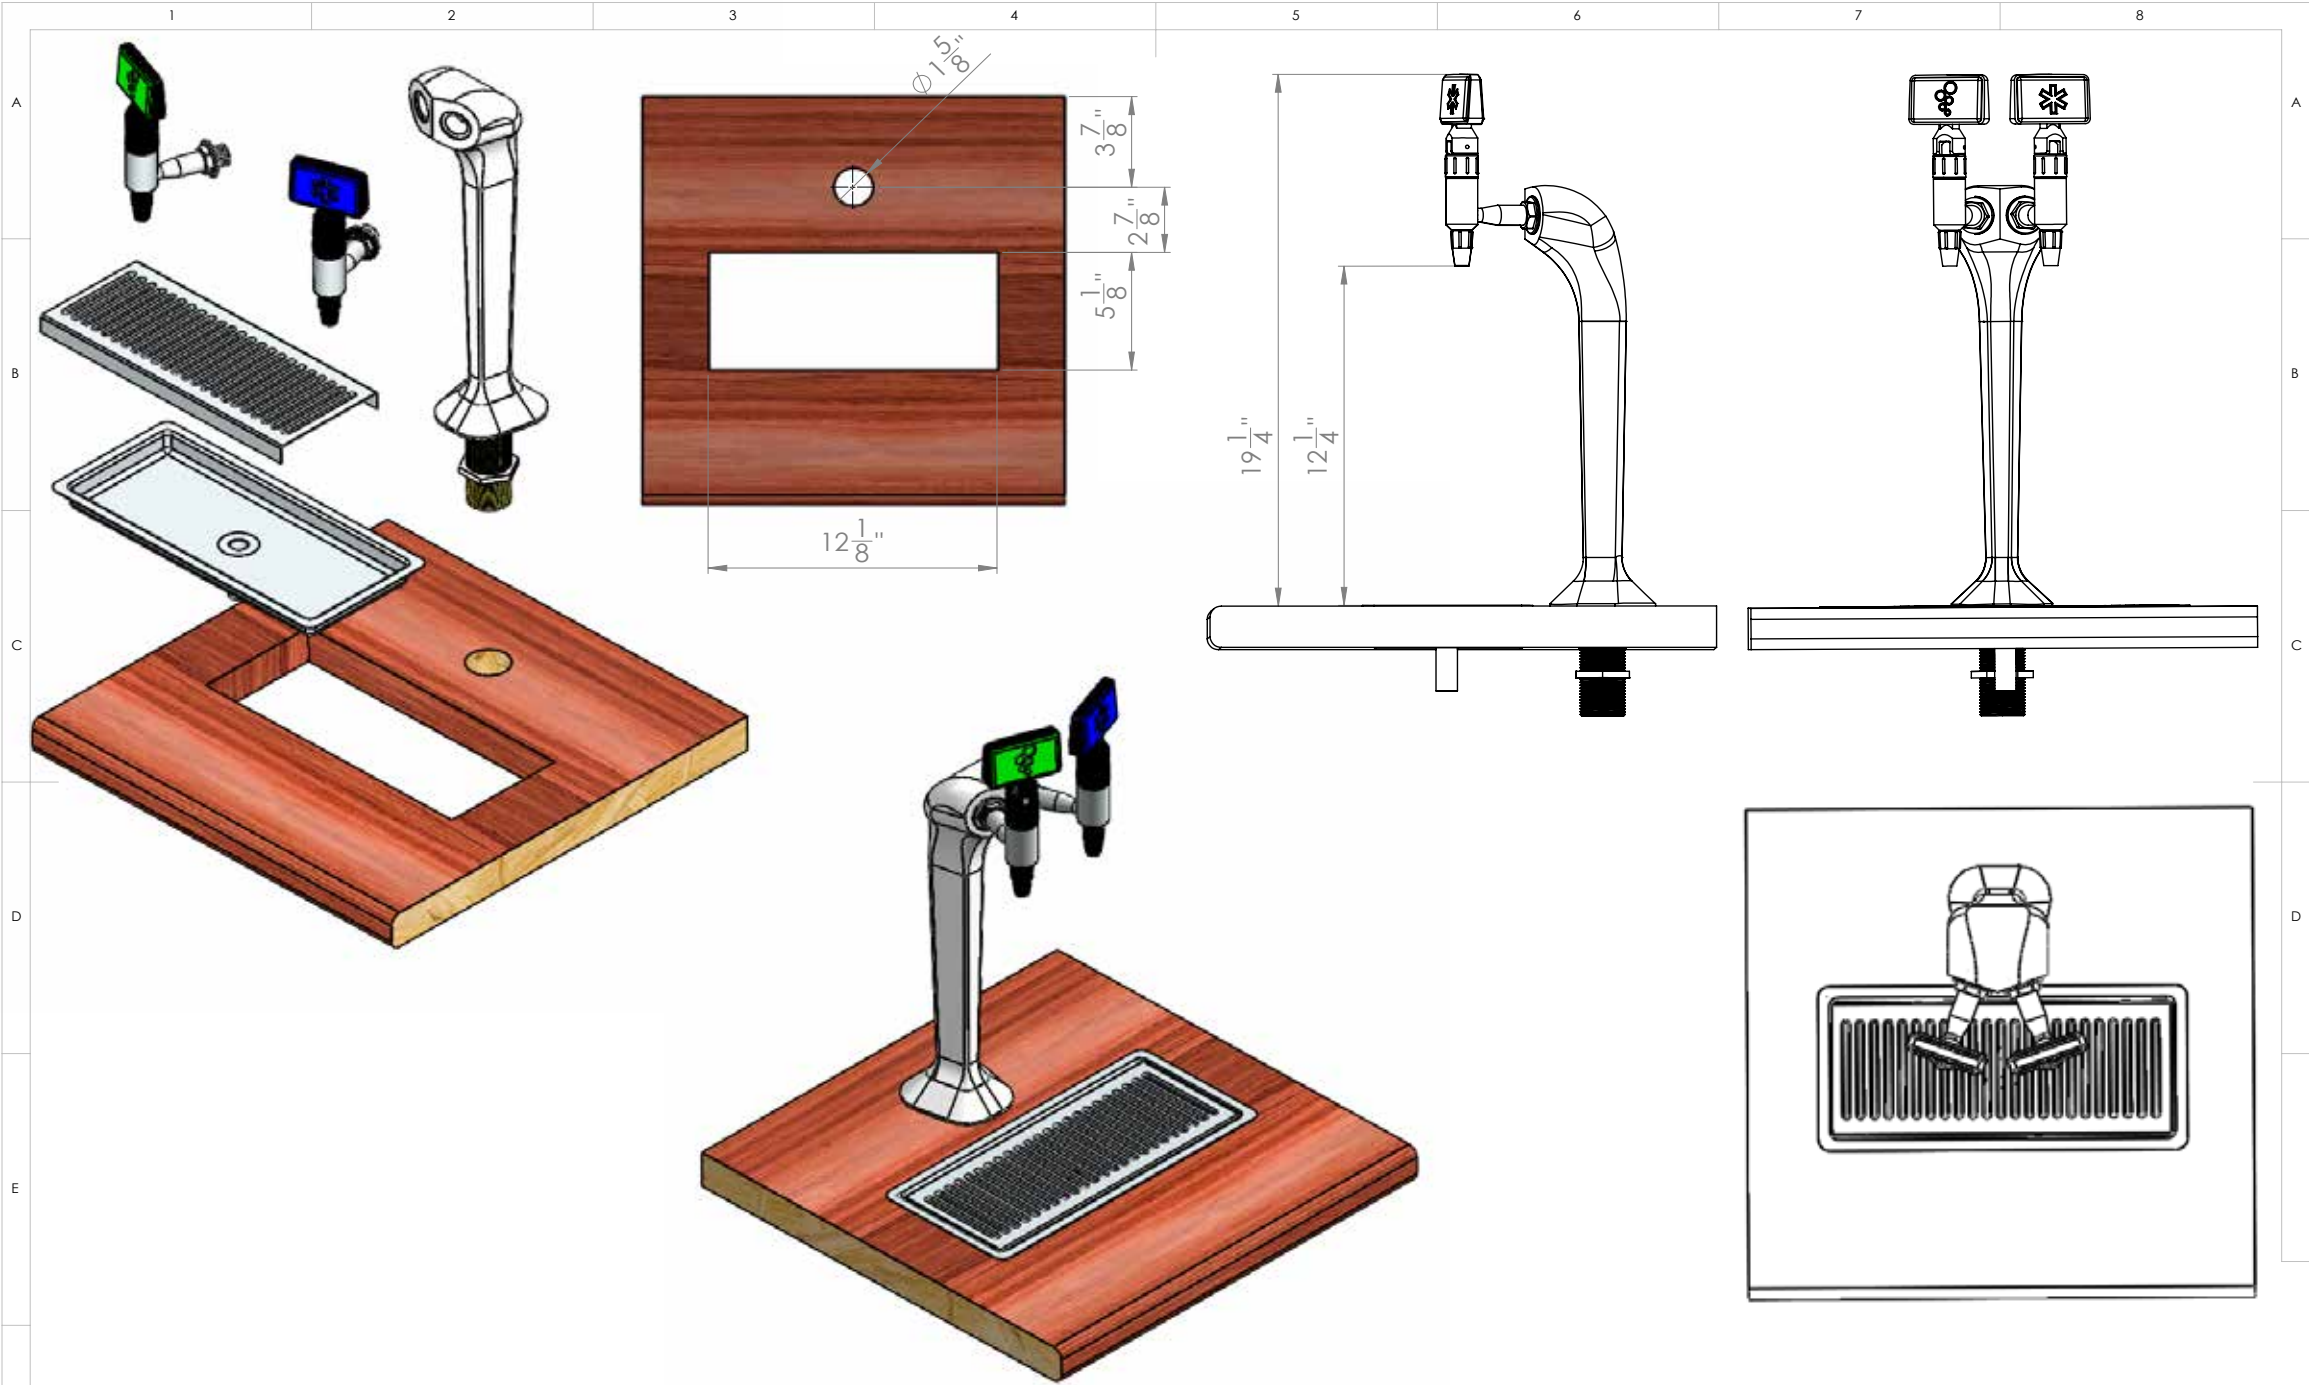

This Drawing is Copyright and is the sole property of VIVREAU LIMITED
It shall not be copied or reproduced in any form without the express
permission of VIVREAU LIMITED. COPYRIGHT © VIVREAU LIMITED 2011

MATERIAL			
FINISH:			
COLOUR			
WEIGHT:	No.	General Revision	RJ 05.12.13
		MODIFICATION	NAME/DATE


VIVREAU North America
Tel 88 999 1044
www.vivreauwater.com

TITLE: Double Cobra/Recessed Tray

DWG NO. DCT- US.04 A Data Base

DRAWN	CHK'D	APP'VD
SCALE: 1:10	ALL DIMENSIONS IN MM	DO NOT SCALE DRAWING
A3	SHEET 1 OF 1	



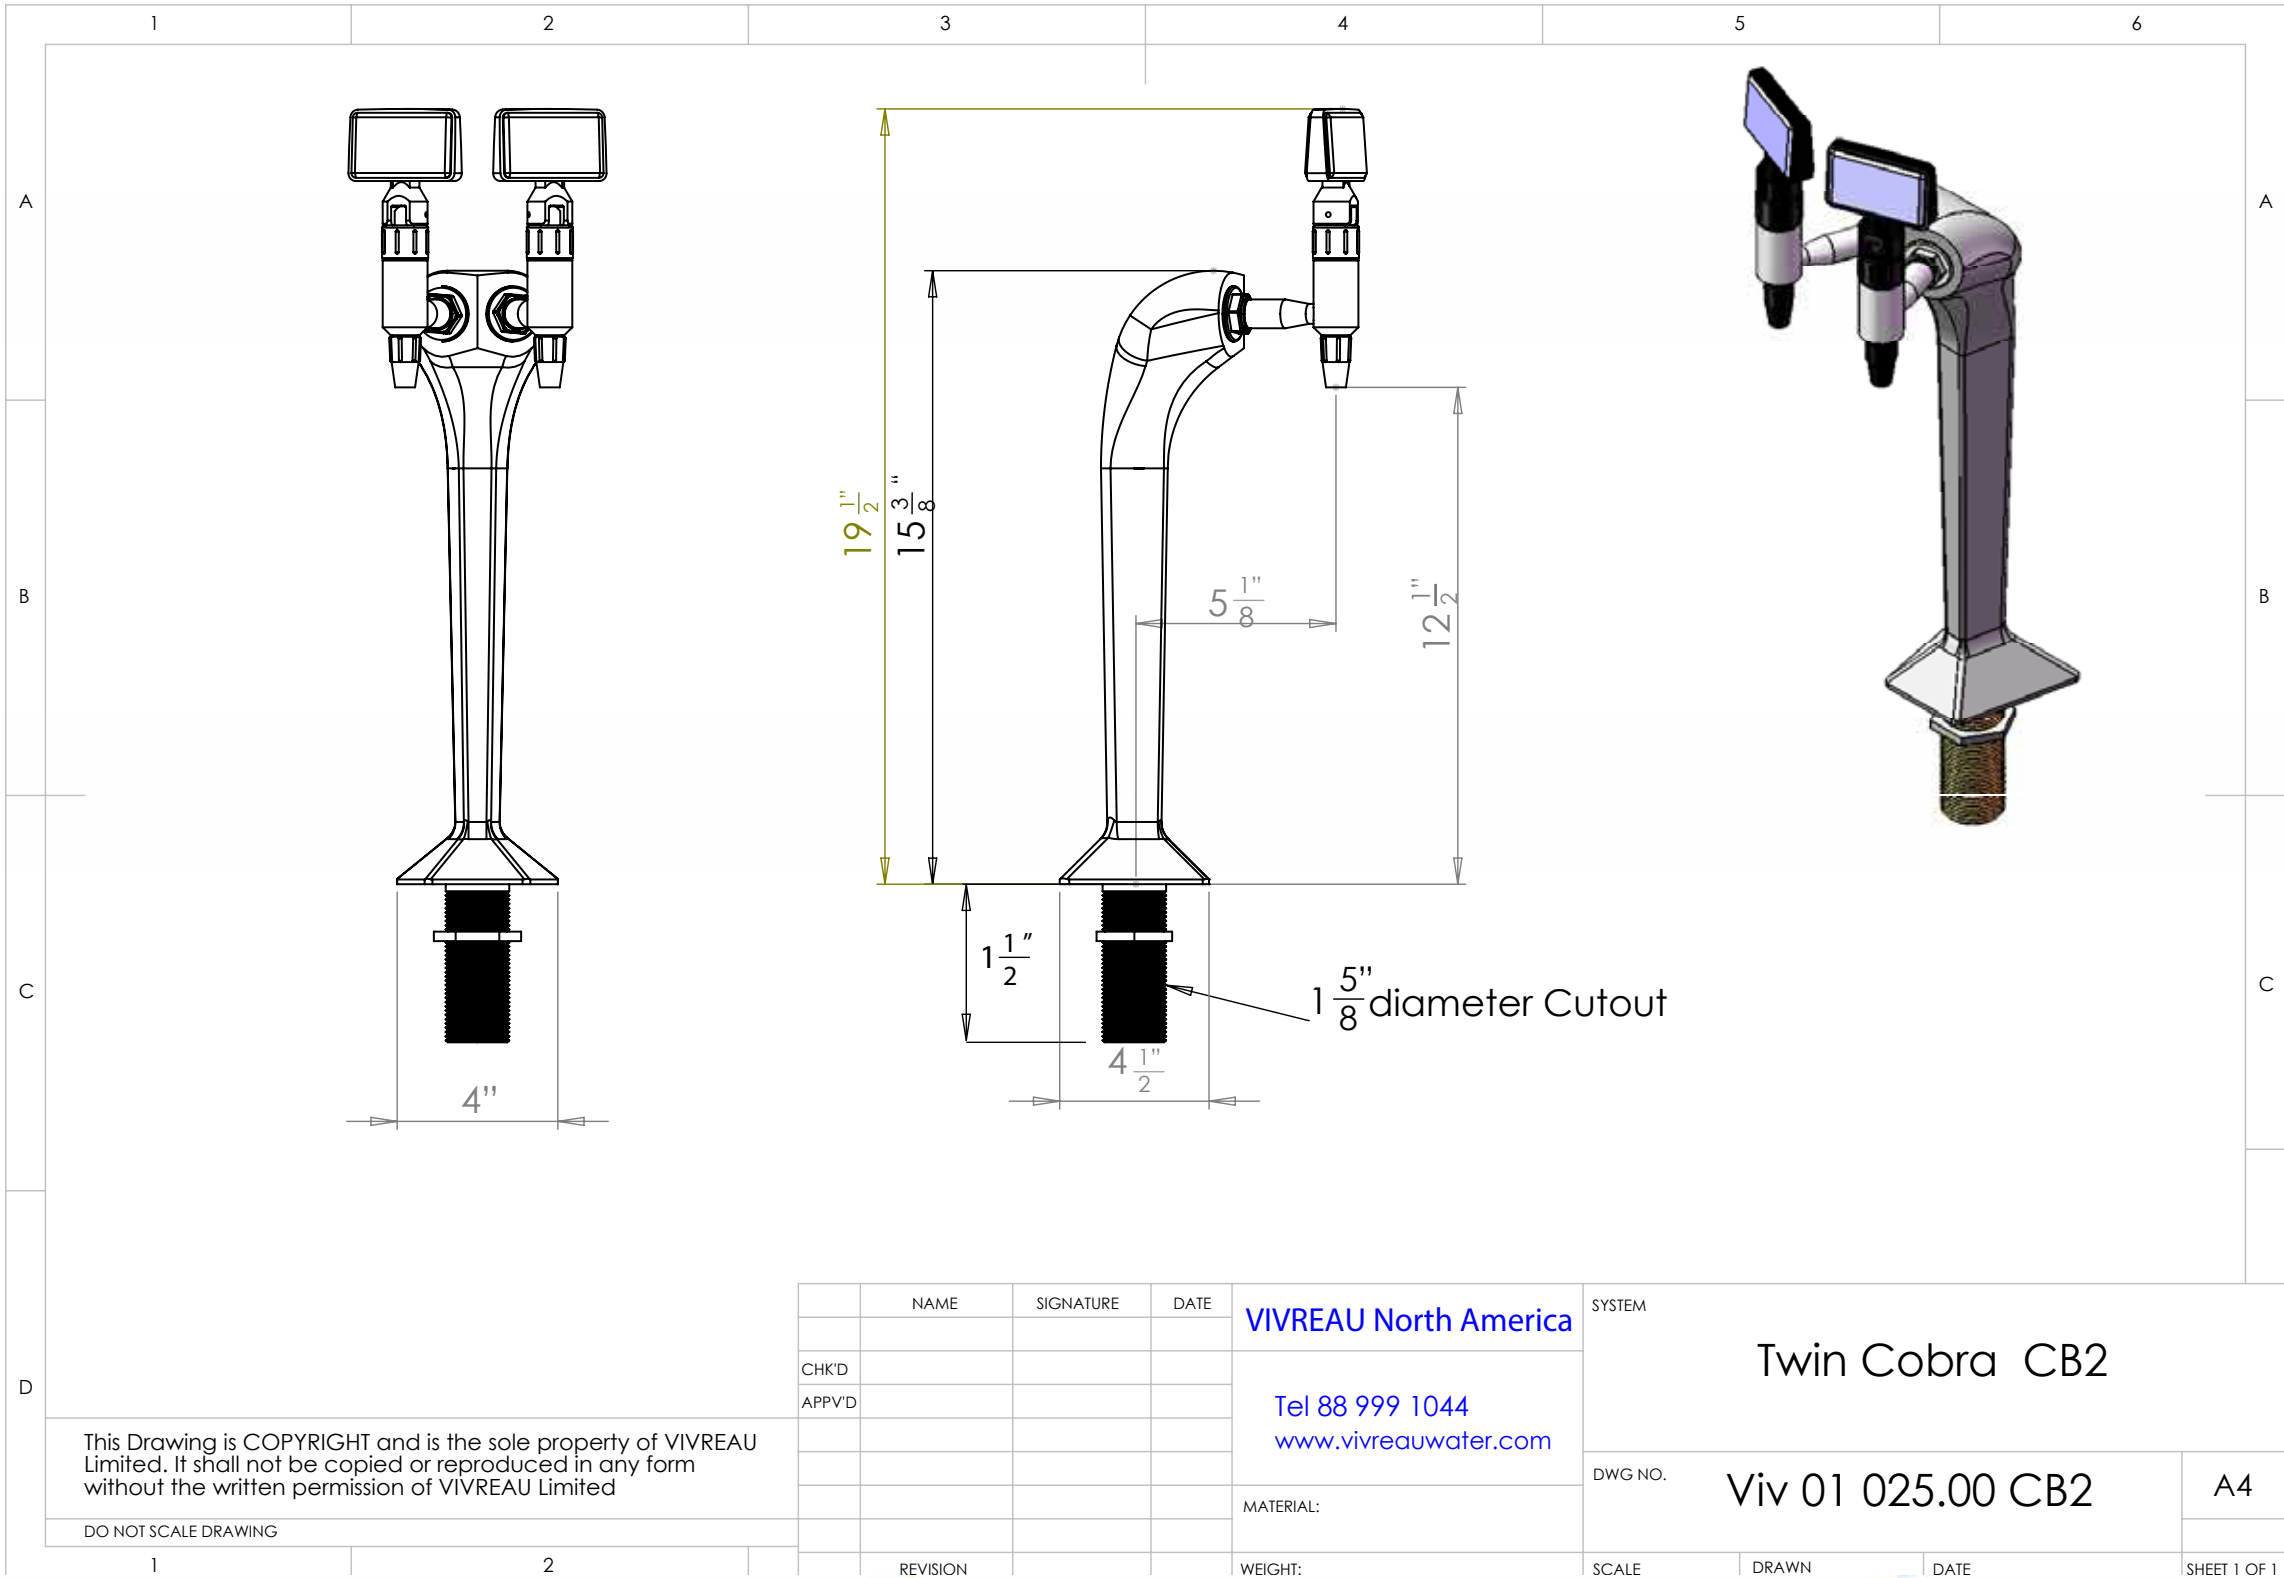


This Drawing is COPYRIGHT and is the sole property of VIVREAU Limited. It shall not be copied or reproduced in any form without the written permission of VIVREAU Limited

DO NOT SCALE DRAWING

	NAME	SIGNATURE	DATE	VIVREAU North America	SYSTEM Twin Cobra CB2			
CHK'D								
APPV'D				Tel 88 999 1044 www.vivreauwater.com	DWG NO. Viv 01 025.00 CB2			
				MATERIAL:	A4			
	REVISION			WEIGHT:	SCALE	DRAWN	DATE	SHEET 1 OF 1



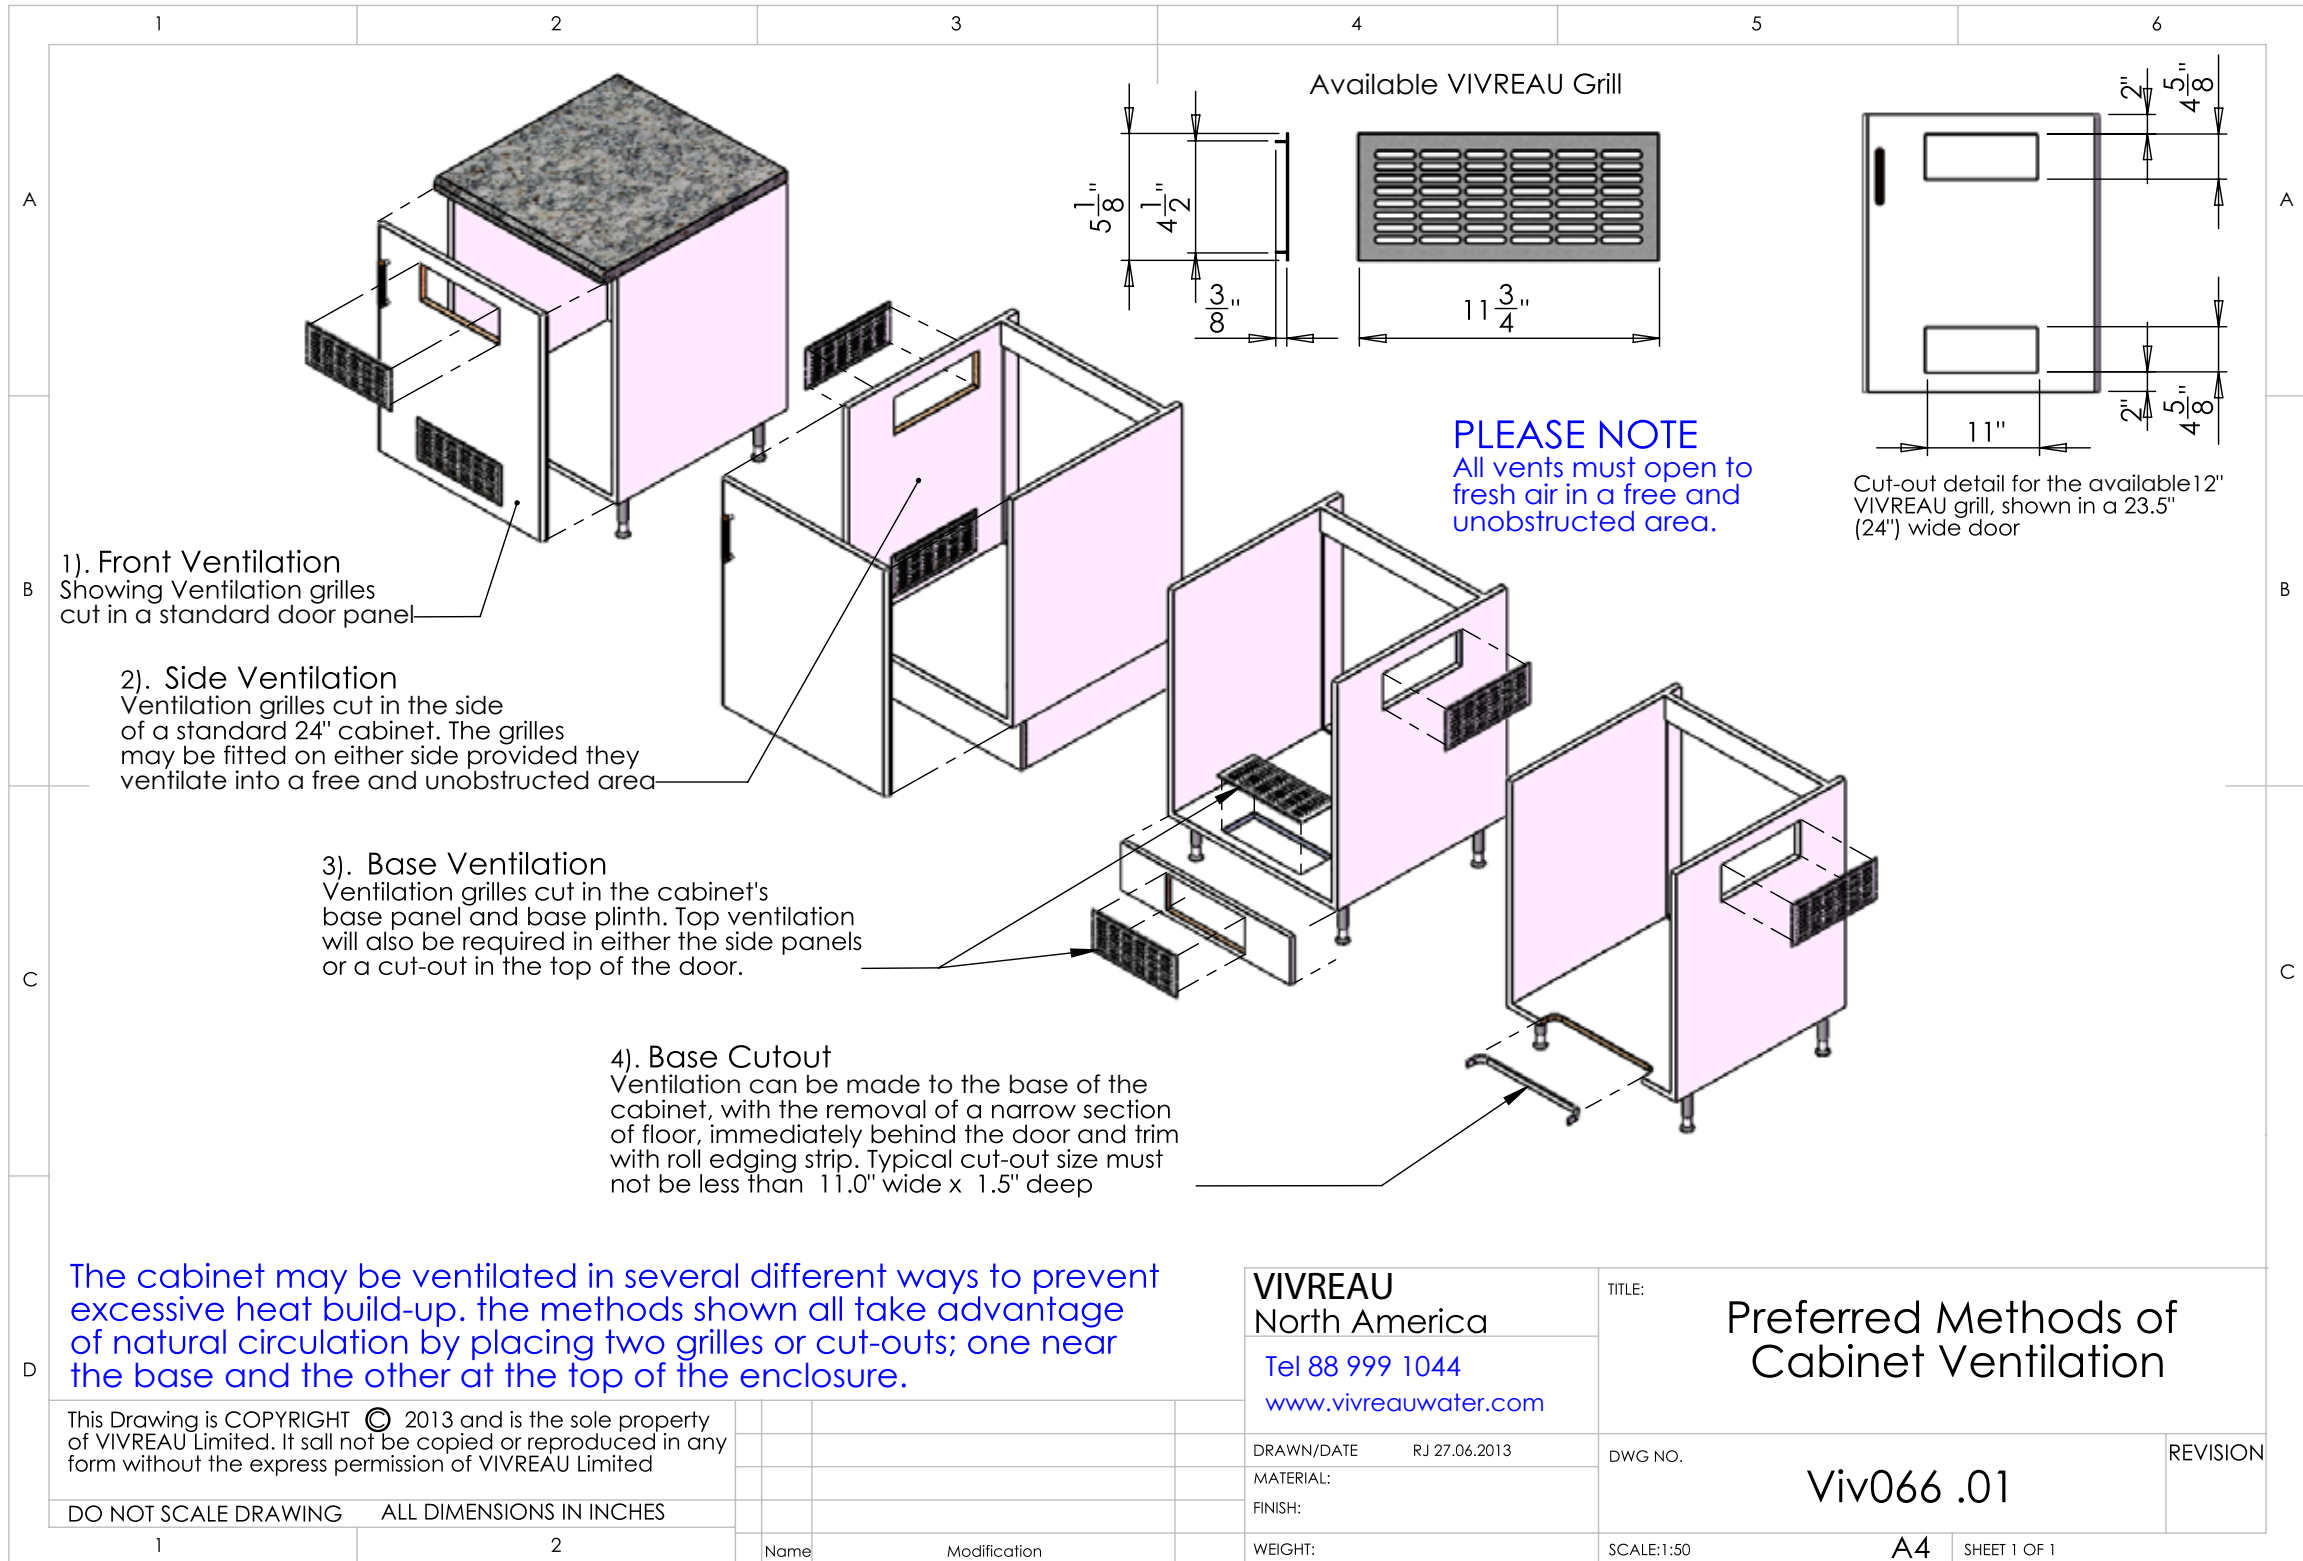

MINI BOTTLER

North America V3-205 Specification Sheet



Intertek



Product Dispensed:

Advanced micro-filtered, chilled still and sparkling water

Application:

For the purpose of filling Vivreau re-usable glass bottles

Equipment Dimensions:

- * Width 14 ¾"
- * Depth 14 ¼"
- * Height 23"

Cobra Tap:

- * 19 ½" (total tap height mounted) *Maximum Counter thickness for mounting cobra tap 1 ½"

*Minimum Space Required for System:

- * Height 29 ½"
- * Width 24"
- * Depth 24"

Please note that the system is installed as an Under Counter unit. Alternatively it can be installed as a Counter Top system.

Countertop: (alternative option)

System is installed as one unit on the countertop with the dispense taps mounted on the front. Refer to Bottler V3-204 specification sheet.

The following services are required to be supplied by the customer and must be available prior to installation:

- * 1 potable 1/2" cold water supply terminating in a 1/2" ball valve, 1/2" female pipe thread. (ball valve must be accessible for service and installation)
- *The Vivreau system incorporates back flow prevention, any additional back flow devices required by local or state code must also be supplied by the customer prior to installation. There should not be any other filters/pre-filters before the Vivreau system.
- * Minimum water pressure 50 PSI



Water Supply
1/2" Threaded Ball Valve





- * 15amp electrical receptacle (5-15 R) 120v/60hz (8 amps)
- * Drip Tray Drain. Customer needs to supply a rigid vertical pipe that drains to a properly trapped drain according to local codes. The vertical pipe for the drip tray drain must be located inside the installation cabinet and must be at least 1 1/4" ID.
- * CO2 - (customer supplied) CO2 must be available for installation.
- * If the system is to be installed in an enclosed space or cabinet adequate ventilation must be provided (failure to provide ventilation will cause system failure).

*If connecting to a bulk or existing CO2 system a CO2 line terminating at a 1/4" barbed shutoff valve must be available within 40" of the Bottling System installation site, 100psi minimum pressure.



Location of Services: (all services must be accessible for installation and service)

- * Please ensure all services are kept within 40" of bottling system
 - * Water shut-off valve to be located at low level. Please ensure that there is sufficient room for a 12" long fitting to be connected to the shut-off valve.
 - * Top of waste receptacle should be located a minimum of 6" below the work surface the drip pan will be installed in.
- *The taps must be mounted on the work surface directly above the main system.

Insulation:

Please ensure that all water pipes feeding the Vivreau System are correctly insulated to ensure that the water does not heat up within the pipes prior to entering the Vivreau system. This is essential for water quality reasons.

If the system is to be installed in an enclosed space, adequate ventilation must be provided.

For Indoor Use Only



EUROPE



VIVREAU UK (head office)
+44 (0)845 674 9655
email: info@vivreau.com



VIVREAU Ireland
+44 (0)845 674 9655
email: info@vivreau.ie



VIVREAU Benelux
Tel: +31 (0)6 1190 6790
Email: info@vivreau-benelux.com



VIVREAU Russia
Tel: +74 9 5620 4720
Email: info@vivreau.ru



VIVREAU Switzerland
+41 (0)22 344 86 70
email: info@vivreau.ch



VIVREAU Poland
Email: info@vivreau.pl

NORTH AMERICA



VIVREAU USA
+1 877 999 1044
email: infousa@vivreau.com



VIVREAU Canada
+1 877 999 1044
email: infocanada@vivreau.com

ASIAN PACIFIC



VIVREAU Australia
Tel: +61 3 9590 0886
Email: info@vivreau-pacific.com



VIVREAU New Zealand
Tel. +64 9 377 8621
Email: info@vivreau-pacific.com



VIVREAU Pacific Islands
Tel. +64 9 377 8621
Email: info@vivreau-pacific.com



VIVREAU South Africa
+27 21 671 6306
email: info@vivreau.co.za

AFRICA



#INNOVATIONS 4U!

info@absystems.ca

(855)532-5522

absystems.ca

